


NSK 54318U参数

| | | | | |
|------|--------|--------|--------|------|
| 外形尺寸 | SD | 90 | mm | 外径 |
| | D | 155 | mm | 宽度 |
| | T1 | 88 | mm | - |
| | T5 | 97.2 | mm | - |
| | T7 | 106 | mm | - |
| | SR | 1.5 | mm | (最小) |
| | SR1 | 1.0 | mm | (最小) |
| | 基本额定载荷 | CAN | 214000 | N |
| COAN | | 525000 | N | 静载荷 |
| CA | | 21900 | kgf | 动载荷 |
| COA | | 53500 | kgf | 静载荷 |
| 极限转速 | GRE | 1100 | 1/min | 脂润滑 |
| | OIL | 1600 | 1/min | 油润滑 |
| 尺寸 | SD3 | 155.0 | mm | - |
| | D1 | 93 | mm | - |
| | D2 | 120 | mm | - |
| | D3 | 160 | mm | - |
| | T2 | 53.5 | mm | - |
| | T6 | 58.1 | mm | - |
| | T8 | 62.5 | mm | - |
| | B | 19 | mm | - |
| | SB | 18.0 | mm | - |
| | A1 | 36.5 | mm | - |
| | R | 112 | mm | - |
| 安装尺寸 | DA | 120 | mm | (最大) |
| | SRA | 1.5 | mm | (最大) |
| | SRB | 1.0 | mm | (最大) |
| 重量 | MASS | 9290 | g | 重量 |
| 型号 | 型号 | 54318U | | - |
| 外形尺寸 | SD2 | 75 | mm | 内径 |

NSK 54318U图片

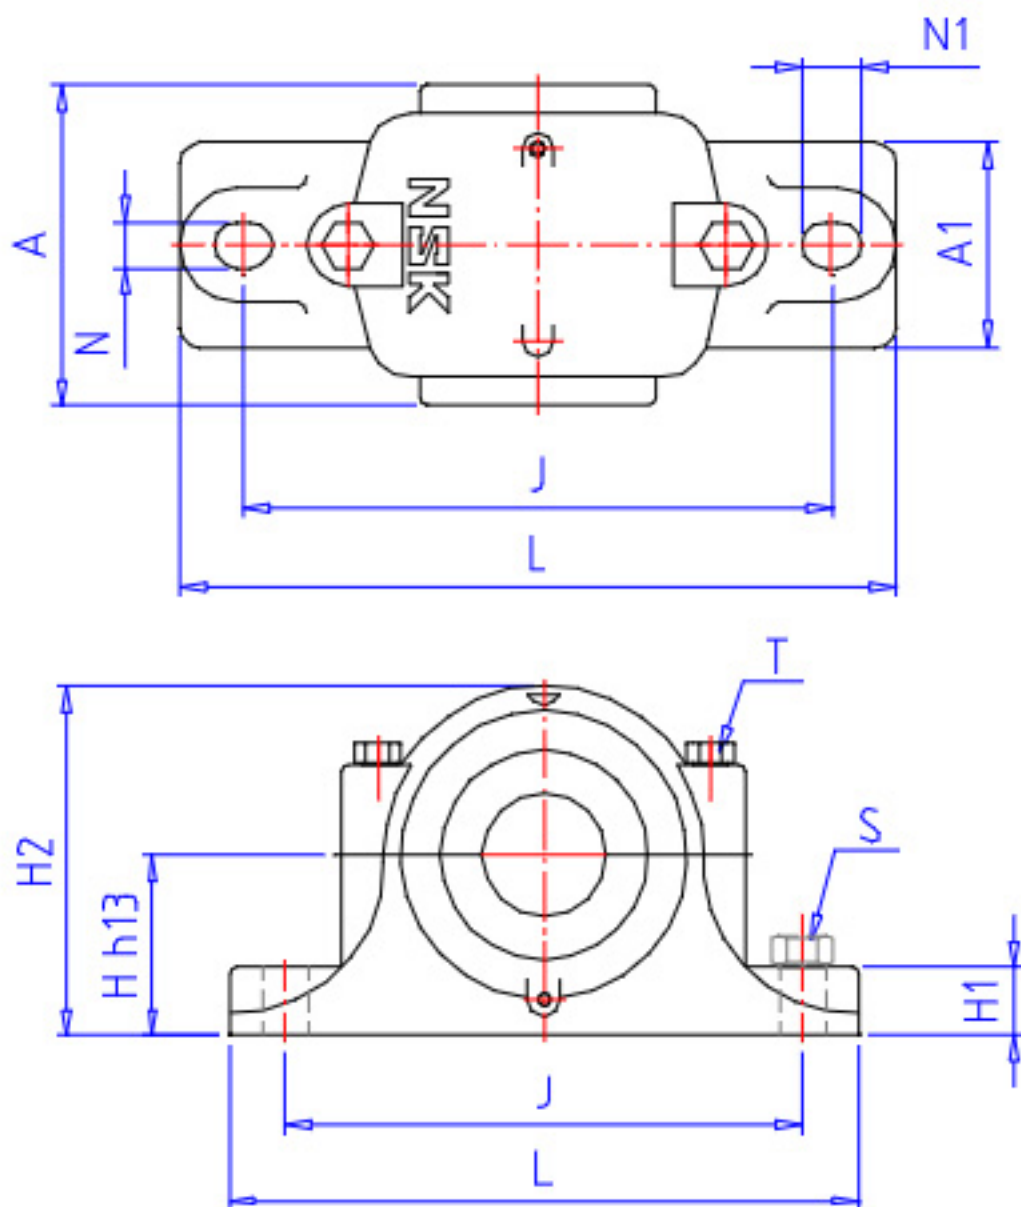

参考资料:<http://www.sozhou.com/p/9389b3ab.html>

